


# 25DU Tandem Dual Gooseneck Dump

<b>G.V.W.R.</b>	25,900#
<b>G.A.W.R. (Ea. Axle)</b>	10,000#
<b>COUPLER</b>	30K 2-5/16" Adjustable Crank Type
<b>SAFETY CHAINS</b>	3/8" Grd. 70 w/Safety Latch Hook (2 each)
<b>JACKS</b>	Two 12,000# Drop Leg Jacks (Bolted On)
<b>NECK</b>	12" Channel
<b>FRAME</b>	12" x 16# I-Beam
<b>FRAME CROSSMEMBERS</b>	8" Channel
<b>BED CROSSMEMBERS</b>	3" Channel
<b>BED LONG SILS</b>	8" Channel
<b>SIDE RAILS</b>	5" x 3" Angle
<b>AXLES</b>	Two 10,000# Dual Wheel Oil Bath Electric Brakes
<b>SUSPENSION</b>	Multi-Leaf Slipper Spring w/Equalizer
<b>TIRE</b>	ST235/16 Load Range E
<b>WHEEL</b>	16 x 6 Dual 8 Bolt
<b>FLOOR</b>	10 Gauge Smooth Steel
<b>LIGHTS</b>	LED D.O.T. Stop, Tail, Turn & Clearance
<b>ELEC. PLUG</b>	7-Way RV
<b>FINISH (Prep)</b>	Steel is Cleaned and Etched to Ensure Smooth, High Bond Paint Adhesion.
<b>FINISH</b>	Painted with High-Solids Supreme Automotive Grade Enamel and Pin-Striped for a Highly Decorative and Protective Finish.

## Standard Features

- Safety Chains Attached w/Cold Rolled Eyelets
- Fully Enclosed Pump & Battery Box Between Gooseneck Uprights
- Lockable Control Unit
- 48" Sides w/Formed Channel Supports
- Double 1/2" Tie Rods on all 4 Sides
- Heavy Duty 10 Gauge Floor
- 4-5/8" D-Rings Inside Bed
- Self Contained Electric Hydraulic Scissor Lift
- 45 Degree Dump Angle
- Rubber Mounted Sealed Lighting & Modular Sealed Wiring Harness
- Complete Break-A-Way System w/Charge Line
- Spare Tire Mount
- Double Rear Gates w/Cam Latch
- Removable Header Across Rear

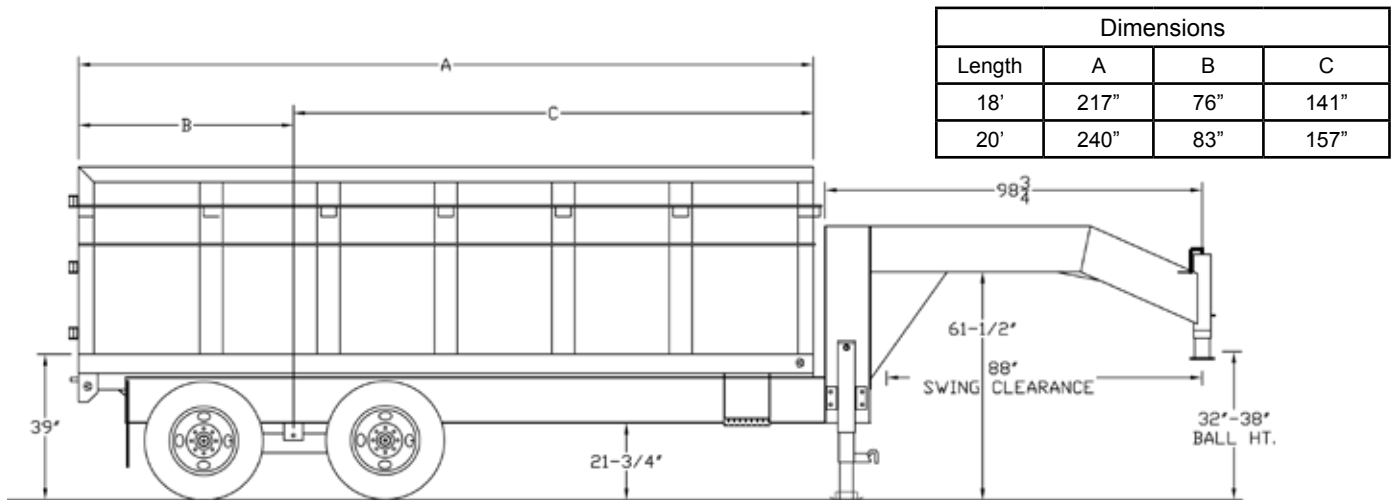

MODEL#	DESCRIPTION
25DU-18	92" x 18' Tandem Dual Gooseneck Dump
25DU-20	92" x 20' Tandem Dual Gooseneck Dump

## TRAILER WEIGHTS & CAPACITIES

LENGTH	EMPTY WEIGHT	PAYLOAD	BOX CAPACITY
18'	7,430#	18,200#	21.98 Cubic Yards
20'	8,480#	18,340#	23.70 Cubic Yards

### OPTIONS

Dual 2-Speed Landing Gear Jacks (150K)	5 Watt Solar Charger
Spare Tire (ST235/16 LR-E)	110V Charger
8' Slide In Ramps	Crank Style Roll Tarp
Wireless Remote	Roll Tarp w/Side Flaps
2 Watt Solar Charger	