


# 100A Tandem Axle Over The Axle

<b>G.V.W.R.</b>	9,990#	<b>AXLES</b>	Two 5,200# EZ Lube w/Electric Brakes
<b>G.A.W.R. (Ea. Axle)</b>	5,200#	<b>SUSPENSION</b>	Multi-Leaf Spring w/Equalizer
<b>COUPLER</b>	Adjustable Forged 2-5/16"	<b>TIRE</b>	ST225/75-15 Load Range D
<b>SAFETY CHAINS</b>	1/4" Grd. 70 w/Safety Latch Hook (2 each)	<b>WHEEL</b>	15 x 6 White Spoke 6 Bolt
<b>JACK</b>	7,000# Top Wind Drop Leg (Bolted On)	<b>FLOOR</b>	2" Pine
<b>TONGUE</b>	Integral w/Frame	<b>LIGHTS</b>	D.O.T. Stop, Tail, Turn & Clearance
<b>TOP RAIL</b>	None	<b>ELEC. PLUG</b>	7-Way RV
<b>FRAME</b>	10" I-Beam	<b>FINISH (Prep)</b>	Steel is Cleaned and Etched to Ensure Smooth, High Bond Paint Adhesion & Undercoated.
<b>CROSSMEMBERS</b>	3" x 3.5" Channel	<b>FINISH</b>	Painted with High-Solids Supreme Automotive Grade Enamel and Pin-Striped for a Highly Decorative and Protective Finish.
<b>SIDE RAILS</b>	5" X 3" Angle w/Stake Pockets & Rubrail on Both Sides, Front & Rear		

### Standard Features

- Adjustable Forged Coupler
- Stake Pockets & Rubrail All 4-Sides
- Complete Break-A-Way System w/Charger
- Safety Chains Attached w/Cold Rolled Eyelets
- Reflective Marker Tape
- Spare Tire Mount
- 7K Drop Leg Jack (Bolted On)
- Floor Secured w/Torx Screws
- Grommet Mount Sealed Lighting
- Cambered EZ Lube Axles
- Two 5,200# Axles w/2 Electric Brakes

Dimensions			
Length	A	B	C
16'	193-1/2"	115"	78-1/2"
18'	217-1/2"	127"	90-1/2"
20'	240"	138"	102"

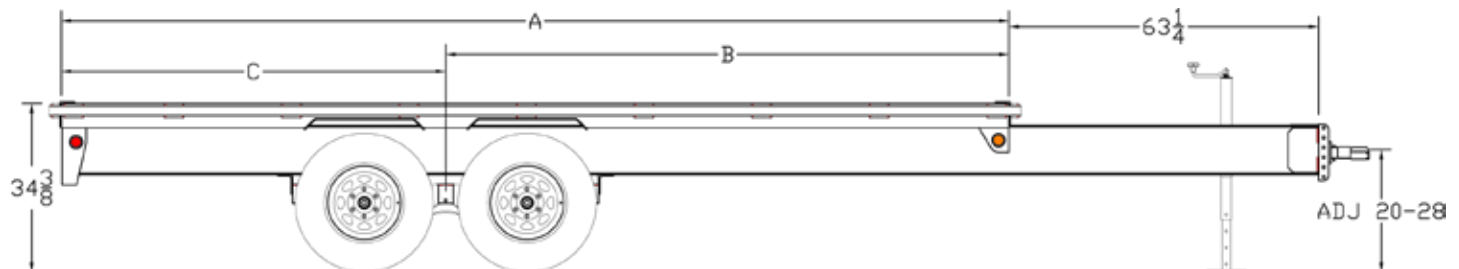

MODEL#	WEIGHT	DESCRIPTION
100A-16	3,000#	102" x 16' Tandem Over The Axle Trailer
100A-18	3,110#	102" x 18' Tandem Over The Axle Trailer
100A-20	3,225#	102" x 20' Tandem Over The Axle Trailer

### OPTIONS

Adjustable Pintle in Channel	Tire Upgrade (7.50 x 16" LT LR-E)
12K Heavy Duty Drop Leg Jack - Top Wind	Spare Tire Upgrade (7.50 x 16" LT LR-E)
Hydraulic Brakes 2 Axles	8' Slide In Ramps
Spare Tire (ST225/75-15 LR-D)	