


# 120A Tandem Axle Over The Axle

<b>G.V.W.R.</b>	12,000#	<b>AXLES</b>	Two 6,000# EZ Lube w/Electric Brakes
<b>G.A.W.R. (Ea. Axle)</b>	5,560#	<b>SUSPENSION</b>	Multi-Leaf Slipper Spring w/Equalizer
<b>COUPLER</b>	Adjustable Forged 2-5/16"	<b>TIRE</b>	7.50 x 16" LT Load Range E
<b>SAFETY CHAINS</b>	1/4" Grd. 70 w/Safety Latch Hook (2 each)	<b>WHEEL</b>	16 x 6 White Spoke 8 Bolt
<b>JACK</b>	7,000# Drop Leg Jack (Bolted On)	<b>FLOOR</b>	2" Pine
<b>TONGUE</b>	Integral w/Frame	<b>LIGHTS</b>	D.O.T. Stop, Tail, Turn & Clearance
<b>TOP RAIL</b>	None	<b>ELEC. PLUG</b>	7-Way RV
<b>FRAME</b>	10" I-Beam	<b>FINISH (Prep)</b>	Steel is Cleaned and Etched to Ensure Smooth, High Bond Paint Adhesion.
<b>CROSSMEMBERS</b>	3" Channel	<b>FINISH</b>	Painted with High-Solids Supreme Automotive Grade Enamel and Pin-Striped for a Highly Decorative and Protective Finish.
<b>SIDE RAILS</b>	5" X 3" x 1/4" Angle w/Stake Pockets & Rubrail on Both Sides, Front & Rear		

## Standard Features

- Adjustable Forged Coupler in Channel
- Safety Chains Attached w/Cold Rolled Eyelets
- 7K Drop Leg Jack (Bolted On)
- Rub Rail w/Stake Pockets
- Reflective Marker Tape
- Floor Secured w/Torx Screws
- Cambered EZ Lube Axles
- Two 6,000# Axles w/2 Electric Brakes
- Complete Break-A-Way System w/Charger
- Spare Tire Mount
- Rubber Mounted Sealed Lighting

Dimensions			
Length	A	B	C
16'	193-1/2"	115"	78-1/2"
18'	217-1/2"	127"	90-1/2"
20'	240"	138"	102"

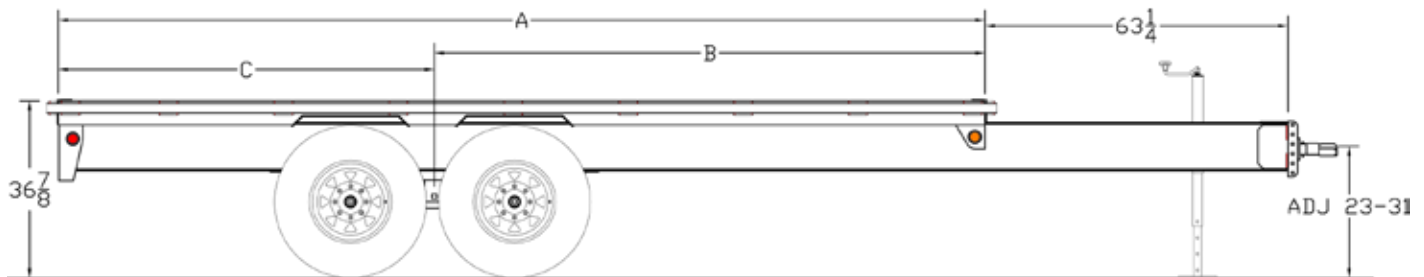

MODEL#	WEIGHT	DESCRIPTION
120A-16	3,100#	102" x 16' Tandem Over The Axle Trailer
120A-18	3,210#	102" x 18' Tandem Over The Axle Trailer
120A-20	3,325#	102" x 20' Tandem Over The Axle Trailer

### OPTIONS

Adjustable Pintle in Channel	Tire Upgrade (ST235/16 LR-E)
12K Heavy Duty Drop Leg Jack - Top Wind	Spare Tire Upgrade (ST235/16 LR-E)
Hydraulic Brakes 2 Axles	8' Slide in Ramps
Spare Tire (7.50 x 16" LT LR-E)	