


12GN/12PH Tandem Axle Gooseneck

G.V.W.R.	12,000#	AXLES	Two 6,000# EZ Lube w/Electric Brakes
G.A.W.R. (Ea. Axle)	5,560#	SUSPENSION	Multi-Leaf Slipper Spring w/Equalizer
COUPLER	2-5/16" Ball Adj. Pipe/3" ID Pintle on PH	TIRE	7.50-16 LT Load Range E
SAFETY CHAINS	3/8" Grd. 70 w/Safety Latch Hook (2 each)	WHEEL	16" x 6 HD White Spoke 8 Bolt
JACKS	Dual 12,000# Drop Leg Jacks (Bolted On), Single 12K TW on PH	FLOOR	2" Pine
NECK	10" Channel	LIGHTS	D.O.T. Stop, Tail, Turn & Clearance
TOP RAIL	None	ELEC. PLUG	7-Way RV
FRAME	12", 16# I-Beam	FINISH (Prep)	Steel is Cleaned and Etched to Ensure Smooth, High Bond Paint Adhesion and Undercoated.
CROSSMEMBERS	3" Channel, 18" Centers	FINISH	Painted with High-Solids Supreme Automotive Grade Enamel and Pin-Striped for a Highly Decorative and Protective Finish.
SIDE RAILS	6" Channel w/Rub Rail and Stake Pockets on 24" Centers		

Standard Features

- Safety Chains Attached w/Cold Rolled Eyelets
- Bolt On Jacks w/Greasable Handle
- Pintle has Single TW Drop Leg Jack
- 96" Overall Width
- 2 Side Bed Steps
- 3/8" Heavy Duty Rub Rail
- Safety Reflective Marker Tape
- Floor Secured w/Torx Screws
- Cambered EZ Lube Axles
- Complete Break-A-Way System w/Battery & Charger
- Spare Tire Mount
- Rubber Mounted Sealed Lighting
- 5' Dovetail w/Double Hinged Fold Over Ramps

Dimensions w/Dovetail			
Model	A	B	C
20 + 5	240"	196"	44"
22 + 5	264"	216"	48"
24 + 5	288"	232"	56"
26 + 5	312"	248"	64"

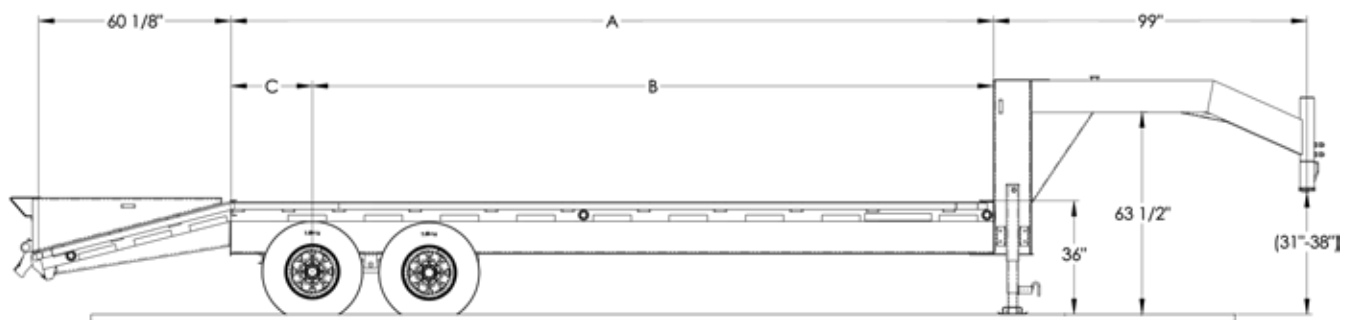

MODEL#	WEIGHT	DESCRIPTION
12GN-20+5	4,825#	96" x 20' + 5' Tandem 12,000# Gooseneck/Pintle
12GN-22+5	4,985#	96" x 22' + 5' Tandem 12,000# Gooseneck/Pintle
12GN-24+5	5,440#	96" x 24' + 5' Tandem 12,000# Gooseneck/Pintle
12GN-26+5	5,695#	96" x 26' + 5' Tandem 12,000# Gooseneck/Pintle

OPTIONS

Spare Tire (7.50 x 16" LT LR-E)	L.E.D. Lighting
Tire Upgrade (ST235/16 LR-E)	Toolbox 18" x 18" x 36" Side Mount
Spare Tire Upgrade (ST235/16 LR-E)	Pintle in Lieu of Gooseneck