


12GP Heavy Duty Pipe Gooseneck

G.V.W.R.	12,000#	AXLES	Two 6,000# EZ Lube w/Electric Brakes
G.A.W.R. (Ea. Axle)	5,560#	SUSPENSION	Multi-Leaf Slipper Spring w/Equalizer
COUPLER	2-5/16" Ball Adjustable Pipe	TIRE	7.50 x 16" LT Load Range E
SAFETY CHAINS	3/8" Grd. 70 w/Safety Latch Hook (2 each)	WHEEL	16 x 6 White Spoke 8 Bolt
JACK	12,000# Drop Leg Jack (Bolted On)	FLOOR	2" Pine
NECK	8" Channel	LIGHTS	D.O.T. Stop, Tail, Turn & Clearance
TOP RAIL	2-7/8" Pipe Square Back	ELEC. PLUG	7-Way RV
FRAME	5" x 3" x 1/4" Angle	FINISH (Prep)	Steel is Cleaned and Etched to Ensure Smooth, High Bond Paint Adhesion.
CROSSMEMBERS	3" x 2" x 3/16" Angle		
UPRIGHTS	3" x 2" x 3/16" x 16"	FINISH	Painted with High-Solids Supreme Automotive Grade Enamel and Pin-Striped for a Highly Decorative and Protective Finish.
FENDERS	9" x 72" Double Broke Diamond Plate w/ Back		

Standard Features

- Gooseneck w/2-5/16" Adjustable Coupler
- Safety Chains Attdhd w/Cold Rolled Eyelets
- 2-7/8" Top Rail Capped w/Self Sealing Plugs on 20' & shorter
- 3" Sq. Tube Top Rail on 22' & Longer
- Tie Down Pockets, Sides, Front & Rear
- Floor Secured w/Torx Screws
- Reflective Marker Tape
- Cambered EZ Lube Axles
- Two 6,000# Axles w/Electric Brakes
- Complete Break-A-Way System w/Charger
- Spare Tire Mount
- 4' Slide In Ramps (Channel)
- Grommet Mount Sealed Lighting

Dimensions			
Length	A	B	C
18'	217-1/2"	72-1/2"	145"
20'	240"	80"	160"

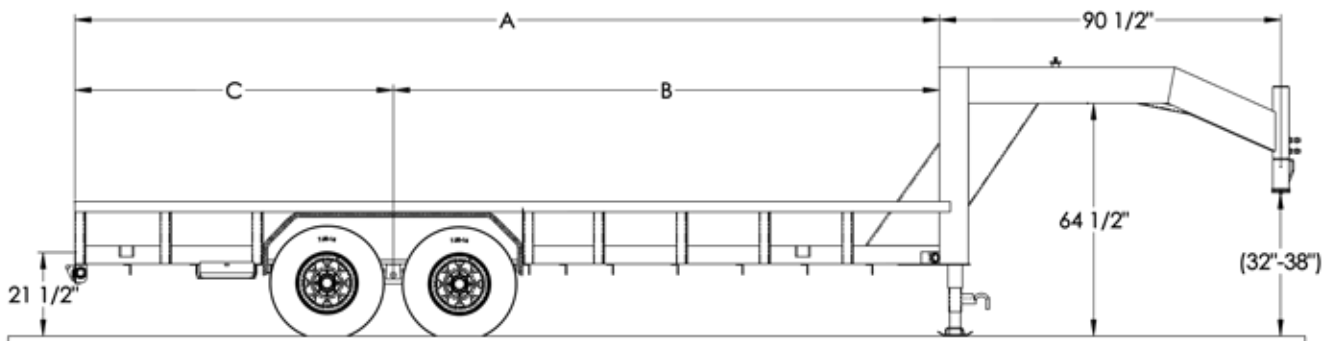

MODEL#	WEIGHT	DESCRIPTION
12GP-18	2,930#	83" x 18' Gooseneck Tandem Axle Pipe Trailer
12GP-20	3,100#	83" x 20' Gooseneck Tandem Axle Pipe Trailer

OPTIONS

Electric Over Hydraulic Brakes (Drums)	Rampgate in Lieu of Ramps
Spare Tire (7.50 x 16" LT LR-E)	Gas Spring Assist Option - Rampgate
Tire Upgrade (ST235/16 LR-E)	4' Integrated Heavy Duty Ramp Gate w/Gas Spring Assist in Lieu of Ramps
Spare Tire Upgrade (ST235/16 LR-E)	5' Stand Up Ramps in Lieu of Slide In