


# 18GN/18PH Triple Axle Gooseneck

<b>G.V.W.R.</b> 18,000#	<b>AXLES</b> Three 6,000# EZ Lube w/Electric Brakes
<b>G.A.W.R. (Ea. Axle)</b> 6,000#	<b>SUSPENSION</b> Multi-Leaf Slipper Spring w/Equalizer
<b>COUPLER</b> 2-5/16" Ball Adj. Pipe, 3" ID Pintle on PH	<b>TIRE</b> ST235/16 Load Range E
<b>SAFETY CHAINS</b> 3/8" Grd. 70 w/Safety Latch Hook (2 each)	<b>WHEEL</b> 16 x 6 White Spoke
<b>JACKS</b> Dual 12K Drop Leg, Single 12K TW on PH	<b>FLOOR</b> 2" Pine
<b>NECK</b> 10" Channel	<b>LIGHTS</b> D.O.T. Stop, Tail, Turn & Clearance
<b>TOP RAIL</b> None	<b>ELEC. PLUG</b> 7-Way RV
<b>FRAME</b> 12", 16# Wide Flange I-Beam	<b>FINISH (Prep)</b> Steel is Cleaned and Etched to Ensure Smooth, High Bond Paint Adhesion and Undercoated.
<b>CROSSMEMBERS</b> 3" Channel, 18" Centers	<b>FINISH</b> Painted with High-Solids Supreme Automotive Grade Enamel and Pin-Striped for a Highly Decorative and Protective Finish.
<b>SIDE RAILS</b> 6" Channel w/Stake Pockets and Rub Rail, 24" Centers	

### Standard Features

- Safety Chains Attached w/Cold Rolled Eyelets
- Dual 12K Drop Leg Jacks on GN/1-12K TW Drop Leg Jack on Pintle
- Bolt On Jacks w/Greasable Handle
- Lockable Toolbox Between GN Uprights
- 102" Overall Width
- 3/8" Heavy Duty Rub Rail
- Safety Reflective Marker Tape
- 3-6K EZ Lube Cambered Axles w/Electric Brakes on all 3
- Spare Tire Mount
- Complete Break-A-Way System w/Battery & Charger
- Modular Sealed Wiring Harness
- Rubber Mounted Sealed Lighting
- 5' Dovetail w/Double Hinged Spring Assist Fold Over Ramps

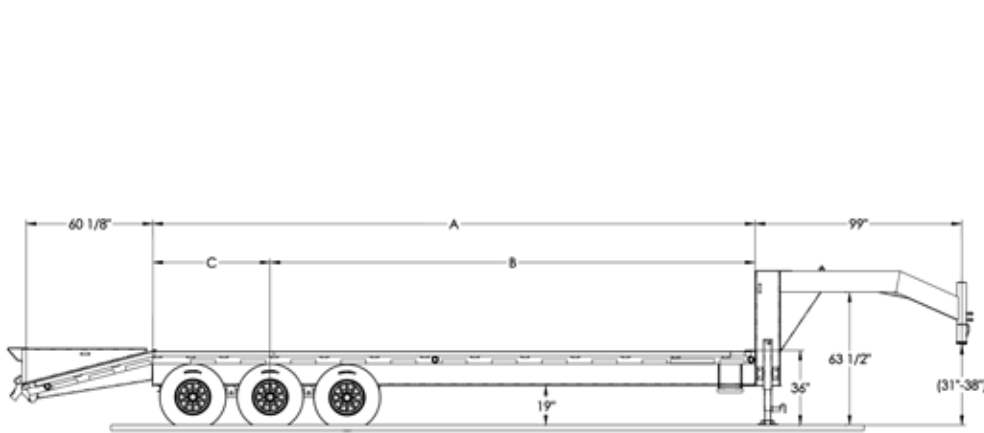

Dimensions			
Model	A	B	C
24 + 5	288"	232"	56"
28 + 5	336"	264"	72"
30 + 5	360"	280"	80"
32 + 5	384"	296"	88"
34 + 5	408"	312"	96"

MODEL#	WEIGHT	DESCRIPTION
18GN-24+5	5,550#	102" x 24' + 5' Triple Axle 18,000# Gooseneck
18GN-28+5	5,905#	102" x 28' + 5' Triple Axle 18,000# Gooseneck
18GN-30+5	6,615#	102" x 30' + 5' Triple Axle 18,000# Gooseneck
18GN-32+5	6,970#	102" x 32' + 5' Triple Axle 18,000# Gooseneck
18GN-34+5	7,325#	102" x 34' + 5' Triple Axle 18,000# Gooseneck

### OPTIONS

30K Square Adjustable Screw Type Coupler	Tool Box 18" x 18" x 36" Side Mount
Dual 2 Speed Landing Gear Jacks (150K)	L.E.D. Lighting
Electric Over Hydraulic Brakes (Drums)	Center Popup Dovetail w/5' Fold Up Ramps
Torsion Axles	No Dovetail Option
Spare Tire (ST235/85R-16 LR-E)	Pintle in Lieu of Gooseneck
Low Profile Tool Box 12" x 18" x 36" Side Mount	