

20GN/20PH Tandem Axle Gooseneck


G.V.W.R.	20,000#	AXLES	Two 10,000# Dual Wheel Electric Brakes
G.A.W.R. (Ea. Axle)	9,760#	SUSPENSION	Multi-Leaf Slipper Spring w/Equalizer
COUPLER	2-5/16" Ball Adj. Pipe or 3" ID Pintle	TIRE	ST235 D-16" Load Range E Dual
SAFETY CHAINS	3/8" Grd. 70 w/Safety Latch Hook (2 each)	WHEEL	16 x 6 Dual 8 Bolt
JACKS	12K Drop Leg Jack (Bolted On)	FLOOR	2" Pine
NECK	12" I-Beam	LIGHTS	D.O.T. Stop, Tail, Turn & Clearance
TOP RAIL	None	ELEC. PLUG	7-Way RV
FRAME	12" I-Beam	FINISH (Prep)	Steel is Cleaned to Ensure a Professional Smooth Finish.
CROSSMEMBERS	3" Channel	FINISH	Superior Quality Finish is Applied for a Highly Decorative and Protective Finish.
SIDE RAILS	5" Channel w/Rub Rail and Stake Pockets on 24" Centers		

Standard Features

- Safety Chains Attached w/Cold Rolled Eyelets
- 12K Drop Leg Jack on GN/12K TW Drop Leg Jack on Pintle
- Bolt On Jack w/Greasable Handle
- 102" Overall Width
- 3/8" Heavy Duty Rub Rail
- Safety Reflective Marker Tape
- Two 10,000# Oil Bath Axles
- Complete Break-A-Way System w/Battery & Charger
- Spare Mount
- Rubber Mounted Sealed Lighting
- 5' Dovetail w/Double Hinged Fold Over Ramps


20GN

Dimensions w/Dovetail			
Model	A	B	C
20 + 5	240"	196"	44"

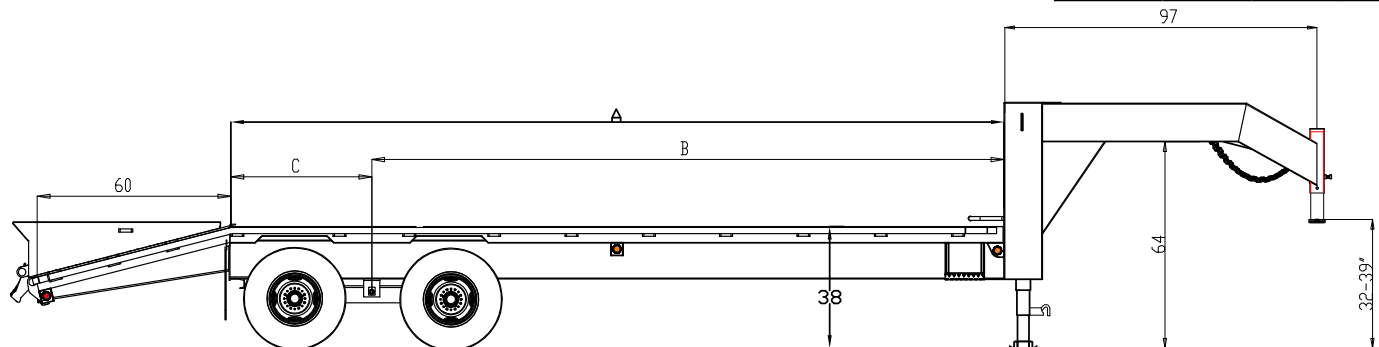

20PH

Dimensions w/Dovetail			
Model	A	B	C
20 + 5	240"	196"	44"

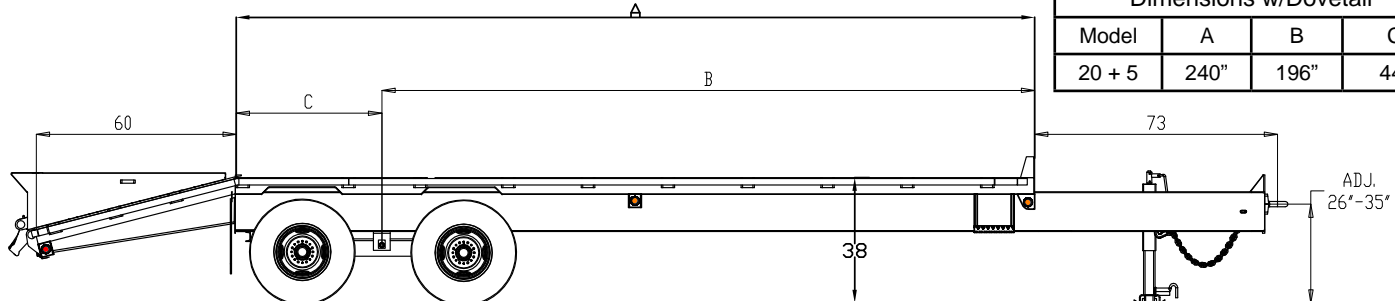

MODEL#	WEIGHT	DESCRIPTION
20GN-20+5	5,130#	102" x 20' + 5' Tandem 20,000# Gooseneck
20PH-20+5	5,130#	102" x 20' + 5' Tandem 20,000# Pintle

OPTIONS

Spare Tire (ST235 D-16" LR-E Dual)
