


20ED/20AD Pintle Equipment Transport

G.V.W.R.	25,900#	AXLES	Two 10,000# Heavy Duty Dual Wheel Axles - Oil Bath; Electric Brakes (ED) or Air Brakes (AD)
G.A.W.R. (Ea. Axle)	10,000#	SUSPENSION	Hutch 9,700 Adjustable
COUPLER	60K, 3" ID Pintle Eye	TIRE	ST235/16 Load Range E
SAFETY CHAINS	3/8" Grd. 70 w/Safety Latch Hook (2 each)	WHEEL	16 x 6 Dual 8 Bolt
JACK	12,000# TW Drop Leg Jack	FLOOR	2" Nominal Oak (S4S)
TONGUE	Integral w/Frame	LIGHTS	LED D.O.T. Stop, Tail, Turn & Clearance
TOP RAIL	None	ELEC. PLUG	7-Way RV
FRAME	12" - 16# I-Beam	FINISH (Prep)	Steel is Cleaned and Etched to Ensure Smooth, High Bond Paint Adhesion.
CROSSMEMBERS	6" Jr. I-Beam on 16" Centers	FINISH	Painted with High-Solids Supreme Automotive Grade Enamel and Pin-Striped for a Highly Decorative and Protective Finish.
SIDE RAILS	8" Channel		

Standard Features

- 3 Position Pintle Adjustment
- Safety Chains Attd w/Cold Rolled Eyelets
- Storage Area in Tongue
- Modular Sealed Wiring Harness
- Bolt On Jack
- Safety Reflective Marker Tape
- 102" Wide
- Low Profile Bed
- Two (2) Side Bed Steps
- Oak Flooring
- Six 5/8" O.D. D-Rings
- Modular Sealed Wiring Harness
- 12-1/4 x 4 HD Brakes; Electric has complete Break-A-Way System and Air has Automatic Slack Adjusters, Spring Brakes and ABS
- All Rubber Mounted Sealed LED Lighting
- 5' Dove Tail w/Double Hinged Spring Assist Ramps

Dimensions With Dovetail			
Length	A	B	C
20' + 5'	300"	113"	187"
24' + 5'	348"	137"	211"

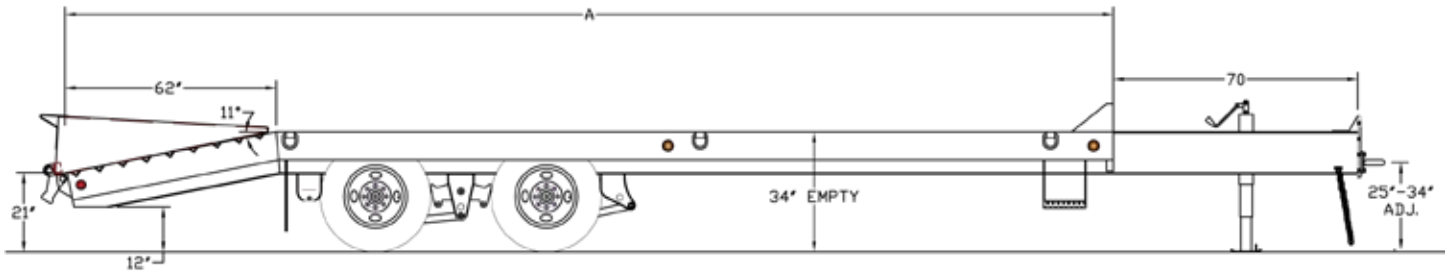

MODEL#	WEIGHT	DESCRIPTION
20ED-20+5	5,900#	102" X 20' + 5' Tandem Dual 25,900# Pintle w/Electric Brakes
20ED-24+5	7,020#	102" x 24' + 5' Tandem Dual 25,900# Pintle w/Electric Brakes
20AD-20+5	5,900#	102" x 20' + 5' Tandem Dual 25,900# Pintle w/Air Brakes
20AD-24+5	7,020#	102" x 24' + 5' Tandem Dual 25,900# Pintle w/Air Brakes

OPTIONS

Vertical Spare Mount	Spare Tire (ST235/16 LR-E)
Single 2 Speed Drop Leg Jack	Tire Upgrade (ST235/16 LR-G)
Dual 2 Speed Landing Gear Jacks (150K)	Spare Tire Upgrade (ST235/16 LR-G)
Lockable Lid Cover Tool Storage in Tongue	Tire Upgrade (ST215/17.5 LR-H)
Extra 5/8" D-Ring (Each)	Spare Tire Upgrade (ST215/17.5 LR-H)