

60CH Tandem Axle Car Hauler Special


G.V.W.R. 6,000#	AXLES Two 3,500# EZ Lube w/1 Elec. Brake
G.A.W.R. (Ea. Axle) 3,500#	SUSPENSION Multi-Leaf Spring w/Equalizer
COUPLER 2" A-Frame	TIRE ST205/75-15 Load Range C
SAFETY CHAINS 1/4" Grd. 70 w/Safety Latch Hook	WHEEL 15 x 5 White Spoke 5 Bolt
JACK 2,000# Top Wind (Bolted On)	FLOOR 2" Pine
TONGUE 4" Channel	LIGHTS D.O.T. Stop, Tail, Turn & Clearance
TOP RAIL None	ELEC. PLUG 7-Way RV
FRAME 5" x 3" x 1/4" Angle	FINISH (Prep) Steel is Cleaned and Etched to Ensure Smooth, High Bond Paint Adhesion.
CROSSMEMBERS 3" x 2" x 3/16" Angle	FINISH Painted with High-Solids Supreme Automotive Grade Enamel and Pin-Striped for a Highly Decorative and Protective Finish.
UPRIGHTS None	
FENDERS 9" x 72" Rolled Formed w/Back	

Standard Features

- Safety Chains Attached w/Cold Rolled Eyelets
- Sand Foot on Jack
- Lower Jack Support Plate
- Tie Down Pockets Sides & Front
- Floor Secured w/Torx Screws
- Cambered EZ Lube Axles
- Two 3,500# Axles w/1 Electric Brake
- Complete Break-A-Way System w/Charger
- Grommet Mount Sealed Lighting

Shown with Optional Slide In Ramps

Dimensions			
Length	A	B	C
14'	169-1/2"	103"	66-1/2"
16'	193-1/2"	115"	78-1/2"

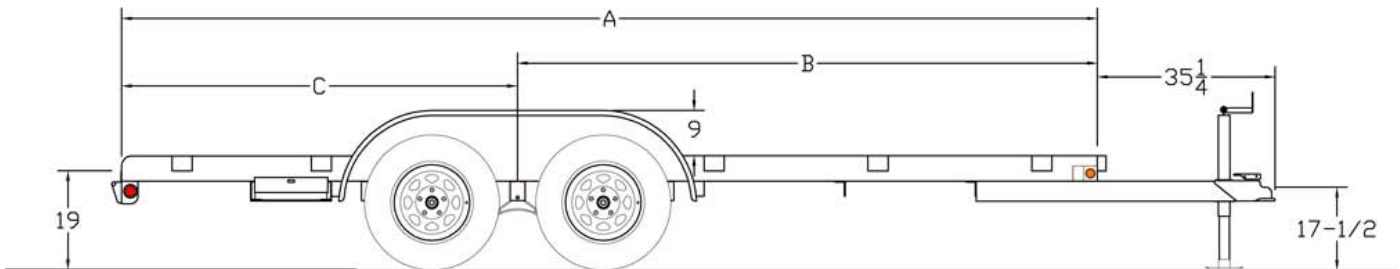

MODEL#	WEIGHT	DESCRIPTION
60CH-14	1,620#	83" x 14' Tandem Axle Trailer
60CH-16	1,670#	83" x 16' Tandem Axle Trailer

OPTIONS

2" Forged Coupler	Hydraulic Brakes 2 Axles
2-5/16" Forged Coupler	Spare Tire Mount
Electric Brakes on 2nd Axle	Spare Tire (ST205/75-15 LR-C)
Hydraulic Brakes 1 Axle	4' Slide in Ramps

STANDARD MODEL - NO OTHER OPTIONS AVAILABLE