

## Redline Packaged Coupler Latch Repair Kits



Trailer towing with a worn or broken coupler is dangerous. Worn or broken couplers should be replaced or repaired. Redline Kits are packaged for showroom display.

PART NO.	REF. NO.	MANUFACTURER	COUPLER STYLE	BALL
CP02-010	264050	ATWOOD	YOKE STYLE	2"
CP02-020	264055	ATWOOD	8031, 80281	2 5/16"
CP02-030	264060	ATWOOD	TRIGGER STYLE A-FRAME	2"
CP02-040	264070	SHELBY	POSI-LOCK, CLASS 1	1 7/8"
CP02-050	264075	SHELBY	POSI-LOCK, CLASS 2	2"
CP02-060	264080	SHELBY	POSI-LOCK, CLASS 3	2"
CP02-090	264100	FULTON	HANDWHEEL (308)	2"
CP02-110	264120	BULLDOG	HI-PROFILE HANDLE	ALL
CP02-120	264125	BULLDOG	PIN & RETAINER	ALL

## Gooseneck Coupler Head



K1

Can be mounted on the trailer as a standard gooseneck coupler or in the truck bed. Removable steel pin secures hitch ball in the cast housing. Meets rated capacity only when used with the pin supplied.

PART NO.	REF. NO.	BALL	DESCRIPTION	CAPACITY
K1	291300	2 5/16"	COUPLER HEAD W/ 1/2" LOCK PIN	30,000 LBS
WF2	291902	3"	GN COUPLER HEAD WITH 34SL PIN	40,000 LBS
12SL	293920		REPLACEMENT LOCK PIN FOR K1 COUPLER	
34SL	293925		REPLACEMENT LOCK PIN FOR WF2 COUPLER	

JACKS,  
COUPLERS  
& WINCHES

## Gooseneck Couplers



SAC2516-I



ST2516NP

These couplers feature a cast cone shaped bottom plate and a heavy-duty cast handle. Replacement screws and nuts are also available.

PART NO.	REF. NO.	BALL	TUBE O.D.	OVERALL HEIGHT	EXTENDED HEIGHT	CAPACITY
ST2516NP	291200	2 5/16"				20,000 LBS
SAC2516-I	293015	2 5/16"	4 1/2" ROUND	28"	38"	24,000 LBS
SAC-BOLT	293900					REPL 3/4" - 10 X 3" SET SCREW FOR #SAC2516
SAC-NUT	293910					REPL 3/4" NUT FOR #SAC2516

**FULTON**

GN24



The Fulton cast steel gooseneck coupler head is designed for easy welding to 3" or 4" diameter tubing. Quick and easy latching action eliminates the need to be in the tow vehicle for hook-up.

PART NO.	REF. NO.	BALL	TUBE O.D.	CAPACITY
GN24	291500	2 5/16"	COUPLER HEAD ONLY	24,000 LBS

## Gooseneck Couplers (continued)

T.E.M.'s "AutoLock" design works on the same principle as a 5th wheel. The jaws of the coupler open and unhook from the hitch ball without having to raise or lower the coupler.



SM2516NP



SM251628 LL2516ST

AUTOLOCK						
PART NO.	REF. NO.	BALL	TUBE O.D.	OVERALL HEIGHT	EXTENDED HEIGHT	CAPACITY
SM2516NP	291400	2 5/16"	COUPLER ONLY NO PIPE			24,000 LBS
SM251628	292400	2 5/16"	4" ROUND	28"	NON-ADJUSTABLE	24,000 LBS
LL2516ST	293400	2 5/16"	4" SQUARE	28"	38"	24,000 LBS

BULLDOG<sup>®</sup> gooseneck couplers are quick and easy to engage, and are strong and secure on the road. The unique, patented, extruded locking plate design and higher strength steel components make BULLDOG<sup>®</sup> gooseneck couplers 65% stronger than similar products.



JACKS,  
 COUPLERS  
 & WINCHES



HBA2516



HBQ2516ADJ



HBQ2516TW



HBA2516-25K



HBA2516-30K

NOTE: Bulldog Gooseneck Couplers are in compliance w/SAE standard J2638.

PART NO.	REF. NO.	BALL	TUBE O.D.	OVERALL HEIGHT	EXTENDED HEIGHT	CAPACITY
HB2516NP	291250	2 5/16"	COUPLER ONLY, NO PIPE			20,000 LBS
HBA2516	293050	2 5/16"	4 1/2" ROUND	29 1/2"	37 1/2"	20,000 LBS
HBQ2516ADJ	293150	2 5/16"	4 1/2" SQUARE	32"	40"	25,000 LBS
HBQ2516TW	293158	2 5/16"	4 1/2" SQUARE	32"	39"	30,000 LBS
HBA2516-25K	293052	2 5/16"	4 1/2" ROUND	29 1/2"	37 1/2"	25,000 LBS
HBA2516-30K	293054	2 5/16"	4 1/2" ROUND	29 1/2"	37 1/2"	30,000 LBS



## King Pin Gooseneck Coupler

Most gooseneck trailers are designed to be towed on a gooseneck hitch ball located in the bed of the tow vehicle. However, this king pin and pipe assembly is designed for those wanting to tow a gooseneck trailer with a 5th wheel hitch. **The king pin is specially designed with zero bolster.** The 4" O.D. round tube will fit as an inner pipe on most standard gooseneck outer tubes. Always follow manufacturer's torque specs when tightening set screws.

PART NO.	REF. NO.	PIPE	DESCRIPTION	CAPACITY
2085205	293799	22"	4" O.D. ROUND TUBE, 22" LONG, LESS OUTER TUBE	30,000 LBS

## Flat Mount Couplers

A flat mount coupler is an excellent alternative to tow rings or pintle hooks. These standard ball couplers work with 2 5/16" hitch balls. Mounts to most trailer nose plates.




PART NO.	REF. NO.	BALL	FINISH	CAPACITY
75074	269350	2 5/16"	PAINTED	25,000 LBS
FMC251614	305817	2 5/16"	PAINTED	14,000 LBS
FC25	305818	2 5/16"	PAINTED	25,000 LBS



75074



FMC251614

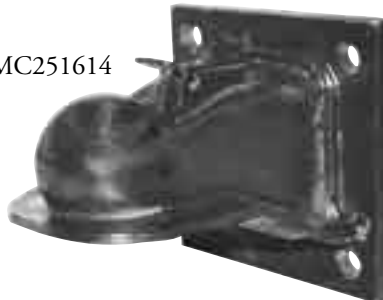

FC25



## Square Mount Draw Bars and Nose Plates



Commonly used on equipment and over-the-road trailers, the flat back design of the following Draw Bars allows easy mounting on the nose plate. The bolt kits are approved for use with the respective draw bars/nose plates.

1250-15



SQUARE MOUNT DRAW BARS						
PART NO.	REF. NO.	TYPE	EYE DIAMETER	GTW LBS	BOLT PATTERN	
1250-15	308400	SAF-HOLLAND	2 1/2"	40,000	4 BOLT, 6" SQUARE	
R49A	308401	WALLACE	2 1/2"	42,000	4 BOLT, 6" SQUARE	
1385	308600	SAF-HOLLAND	3"	60,000	4 BOLT, 6" SQUARE	
R51A	308601	WALLACE	3"	66,000	4 BOLT, 6" SQUARE	



TNP71675



NOSE PLATES			
PART NO.	REF. NO.	DESCRIPTION	FOR USE WITH:
TNP71675	308410	8 HOLE, 3/4" X 7" X 16"	R49A & 1250-15
TNP716100	308610	8 HOLE, 1" X 7" X 16"	R51A & 1385
BLT71675	308412	4 BOLTS, 4 NUTS, 4 WASHERS	TNP71675
BLT716100	308612	4 BOLTS, 4 NUTS, 4 WASHERS	TNP716100