



King Pin Gooseneck Coupler

Most gooseneck trailers are designed to be towed on a gooseneck hitch ball located in the bed of the tow vehicle. However, this king pin and pipe assembly is designed for those wanting to tow a gooseneck trailer with a 5th wheel hitch. **The king pin is specially designed with zero bolster.** The 4" O.D. round tube will fit as an inner pipe on most standard gooseneck outer tubes. Always follow manufacturer's torque specs when tightening set screws.

| PART NO. | REF. NO. | PIPE | DESCRIPTION | CAPACITY |
|----------|----------|------|---|------------|
| 2085205 | 293799 | 22" | 4" O.D. ROUND TUBE, 22" LONG, LESS OUTER TUBE | 30,000 LBS |

Flat Mount Couplers

A flat mount coupler is an excellent alternative to tow rings or pintle hooks. These standard ball couplers work with 2 5/16" hitch balls. Mounts to most trailer nose plates.




| PART NO. | REF. NO. | BALL | FINISH | CAPACITY |
|-----------|----------|---------|---------|------------|
| 75074 | 269350 | 2 5/16" | PAINTED | 25,000 LBS |
| FMC251614 | 305817 | 2 5/16" | PAINTED | 14,000 LBS |
| FC25 | 305818 | 2 5/16" | PAINTED | 25,000 LBS |



75074



FMC251614

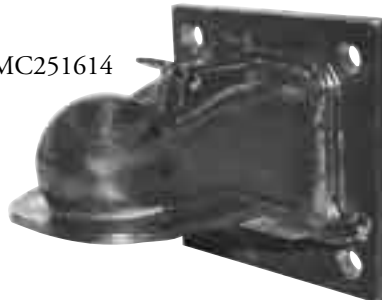

FC25



Square Mount Draw Bars and Nose Plates



Commonly used on equipment and over-the-road trailers, the flat back design of the following Draw Bars allows easy mounting on the nose plate. The bolt kits are approved for use with the respective draw bars/nose plates.

1250-15



| SQUARE MOUNT DRAW BARS | | | | | | |
|------------------------|----------|-------------|--------------|---------|-------------------|--|
| PART NO. | REF. NO. | TYPE | EYE DIAMETER | GTW LBS | BOLT PATTERN | |
| 1250-15 | 308400 | SAF-HOLLAND | 2 1/2" | 40,000 | 4 BOLT, 6" SQUARE | |
| R49A | 308401 | WALLACE | 2 1/2" | 42,000 | 4 BOLT, 6" SQUARE | |
| 1385 | 308600 | SAF-HOLLAND | 3" | 60,000 | 4 BOLT, 6" SQUARE | |
| R51A | 308601 | WALLACE | 3" | 66,000 | 4 BOLT, 6" SQUARE | |



TNP71675



| NOSE PLATES | | | |
|-------------|----------|----------------------------|----------------|
| PART NO. | REF. NO. | DESCRIPTION | FOR USE WITH: |
| TNP71675 | 308410 | 8 HOLE, 3/4" X 7" X 16" | R49A & 1250-15 |
| TNP716100 | 308610 | 8 HOLE, 1" X 7" X 16" | R51A & 1385 |
| BLT71675 | 308412 | 4 BOLTS, 4 NUTS, 4 WASHERS | TNP71675 |
| BLT716100 | 308612 | 4 BOLTS, 4 NUTS, 4 WASHERS | TNP716100 |

Tow Ring Draw Bars

Primarily used on equipment and utility trailers, the single point mounting design eliminates the need for a swivel type pintle hook in demanding off-road situations.



| PART NO. | REF. NO. | TYPE | EYE DIAMETER | GTW LBS | SHANK DIMENSION |
|----------|----------|-------------|--------------|---------|------------------------|
| 1250-3 | 307800 | SAF-HOLLAND | 2 1/2" | 15,000 | 1 1/2" O.D. X 3 1/4" L |
| 050A | 307801 | WALLACE | 2 1/2" | 20,000 | 1 1/2" O.D. X 3 1/4" L |
| 1249-2H | 308000 | SAF-HOLLAND | 3" | 45,000 | 2" O.D. X 4 1/2" L |
| 051B | 308001 | WALLACE | 3" | 50,000 | 2" O.D. X 3 3/4" L |

Flat Draw Bars

The Flat Bar design allows the following Draw Bars to easily bolt to the trailer tongue (#LW10 welds to trailer tongue). For all types of trailer applications.



| PART NO. | REF. NO. | TYPE | EYE DIAMETER | GTW LBS | SHANK DIMENSION |
|----------|----------|-------------|--------------|---------|----------------------|
| LW10 | 308300 | WALLACE | 2 1/2" | 10,000 | 2 1/2" WIDE, 2" LONG |
| 1228-1 | 308800 | SAF-HOLLAND | 2 7/16" | 20,000 | 7 BOLT, 3" X 14 1/4" |
| 043D | 308801 | WALLACE | 2 1/2" | 20,000 | 7 BOLT, 3" X 14 1/4" |
| 1238 | 309000 | SAF-HOLLAND | 3" | 22,000 | 7 BOLT, 3" X 13 5/8" |
| 052D | 309001 | WALLACE | 3" | 22,000 | 7 BOLT, 3" X 14 5/8" |



JACKS,
COUPLERS
& WINCHES



Atwood A-Frame Jacks

For mounting on A-Frame Couplers, the following Atwood jacks come with or without a mounting bracket, for bolt-on or weld-on applications. See page F-21 for Atwood casters and feet.



| PART NO. | REF. NO. | CAPACITY | LIFT | BRACKET HEIGHT | RETRACTED HEIGHT | WIND |
|----------|----------|-----------|------|----------------|------------------|------|
| 40201 | 273300 | 2,000 LBS | 15" | 7.75" | 21" | TOP |
| 87510 | 273400 | 2,000 LBS | 14" | 7.75" | 24.25" | SIDE |
| 80380 | 273600 | 5,000 LBS | 14" | NO BRACKET | 21.75" | TOP |
| 80391 | 273800 | 5,000 LBS | 14" | 11.25" | 22" | TOP |

