


12LP Tandem Axle Low Profile Dump

G.V.W.R.	12,000#	AXLES	Two 6,000# EZ Lube w/Elec. Brake
G.A.W.R. (Ea. Axle)	6,000#	SUSPENSION	Multi-Leaf Slipper Spring w/Equalizer
COUPLER	Adjustable Forged 2-5/16"	TIRE	ST235/16 Load Range E
SAFETY CHAINS	1/4" Grd. 70 w/Safety Latch Hook (2 each)	WHEEL	16 x 6 White Spoke 8 Bolt
JACKS	7K TW Drop Leg (Bolted On)	FLOOR	1 Piece 12 Gauge Smooth Steel
TONGUE	6" Channel Fold Back	LIGHTS	D.O.T. Stop, Tail, Turn & Clearance
FRAME	6" Channel	ELEC. PLUG	7-Way RV
CROSSMEMBERS	4", 13# I-Beam	FINISH (Prep)	Steel is Cleaned and Etched to Ensure Smooth, High Bond Paint Adhesion.
BED CROSSMEMBERS	2" x 2" Square Tubing	FINISH	Painted with High-Solids Supreme Automotive Grade Enamel and Pin-Striped for a Highly Decorative and Protective Finish.
BED LONG SILS	4" Channel		
BED SIDE RAILS	6-1/2" Formed Angle		
FENDERS	Double Sq Broke Diamond Plate		

Standard Features

- Safety Chains Attached w/Cold Rolled Eyelets
- Enclosed Pump & Battery Box Mounted in Front of Bed
- Lockable Control Unit
- 24", 12 Ga. Sides w/Formed Channel Supports
- Modular Sealed Wiring Harness
- 1 Piece 12 Ga. Floor
- 1/2" Tie Rail on all 4 Sides
- 16 Stake Pockets (Sides & Front)
- 4-5/8" D-Rings Inside Bed
- Self Contained Electric/Hydraulic Scissor Lift
- 45 Degree Dump Angle
- Cambered EZ Lube Axles
- Complete Break-A-Way System w/ Charge Line
- Double Rear Gates w/Cam Latch
- Removable Header Across Rear
- Grommet Mount Sealed Lighting

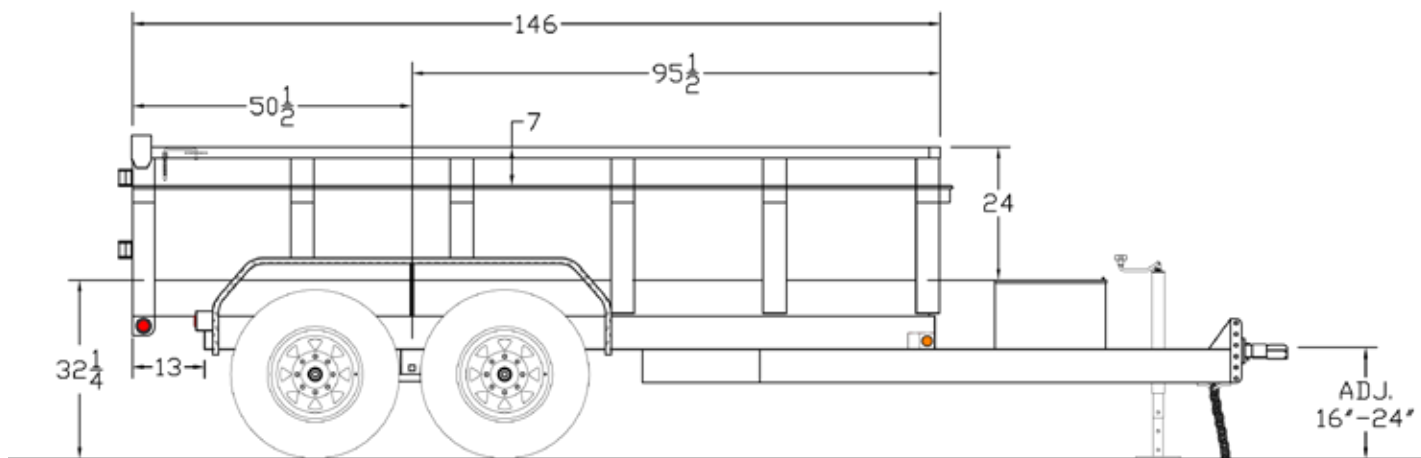

MODEL#	DESCRIPTION
12LP-12	78" x 12' Low Profile Tandem Axle Dump

TRAILER WEIGHTS & CAPACITIES

LENGTH	EMPTY WEIGHT	PAYLOAD	BOX CAPACITY
12'	3,700#	8,250#	5.7 Cubic Yards

OPTIONS

Hydraulic Surge Brakes on Both Axles	3 Way Gate
12K Heavy Duty Top Wind Drop Leg Jack	Wireless Remote
Spare Tire (ST235/16 LR-E)	2 Watt Solar Charger
Spare Tire Mount	5 Watt Solar Charger
24" Expanded Metal Side Extensions - 12'	110V Charger
7' Slide In Ramps	Crank Style Roll Tarp
Adjustable Pintle in Channel	